



**Technical Specifications**


Acoustic cabinet:	SB15
Description:	Bass reinforcement. 15" Subwoofer
Power AES:	800 W.
Power Program:	1.600 W.
Sensitivity 2,83v @ 1m:	103 dB.
Max. SPL continuous:	132 dB.
Max. SPL peak:	138 dB.
Frequency response:	40 - 200 Hz.
Bass Loudspeakers:	15P80ND

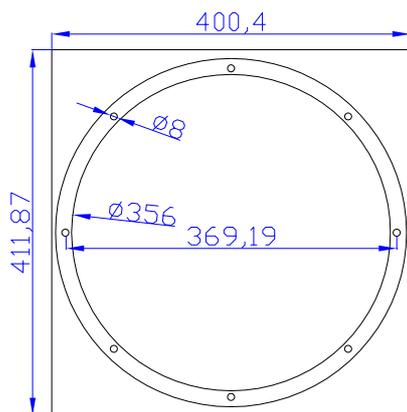


**Base**

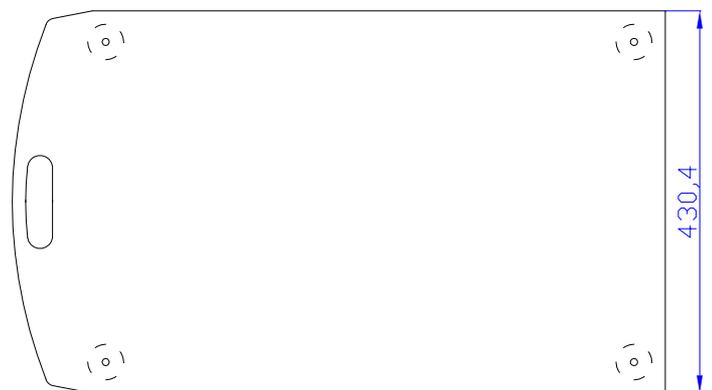


**Rear**

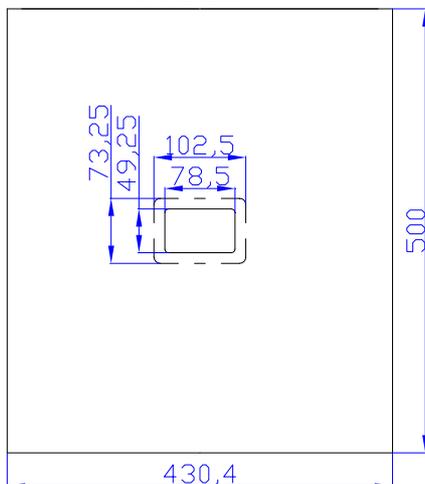


**Lateral**

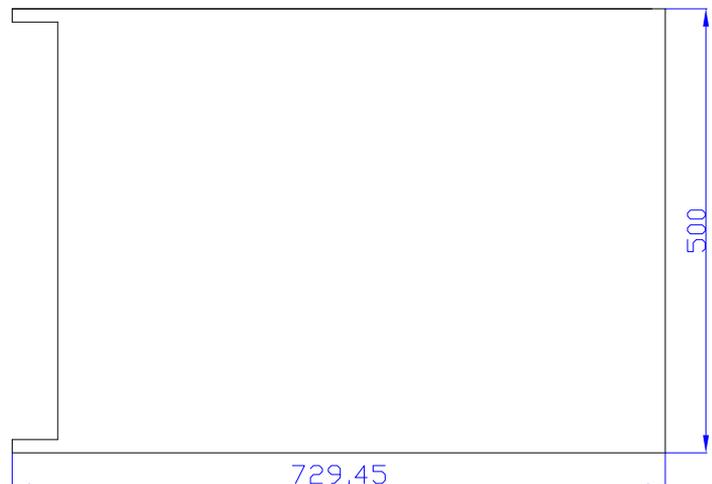


**Front**

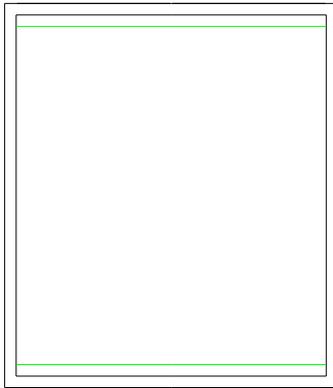



**Lateral**

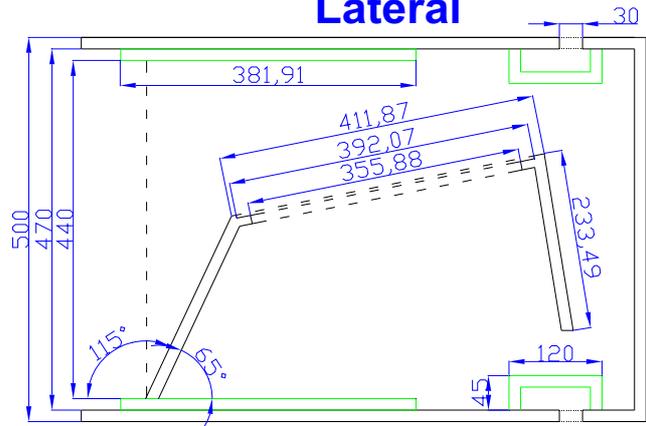

**Central**

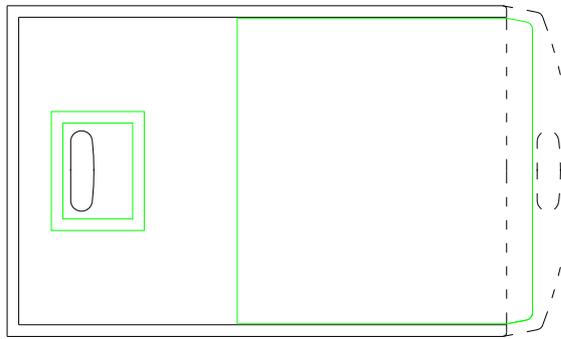


**Base**

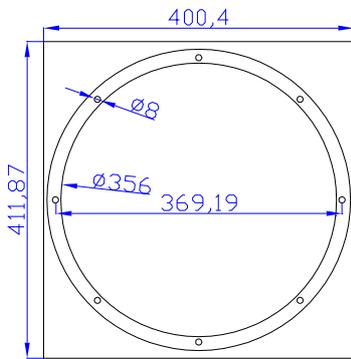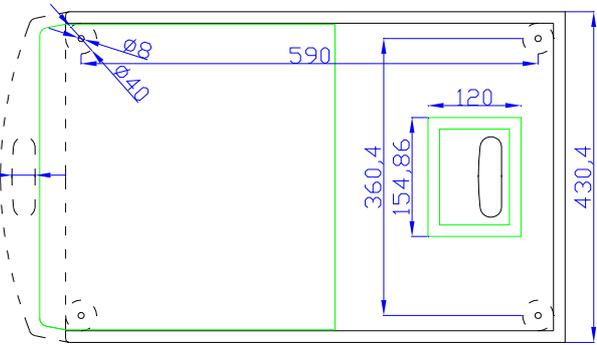


**Base**



**Rear**

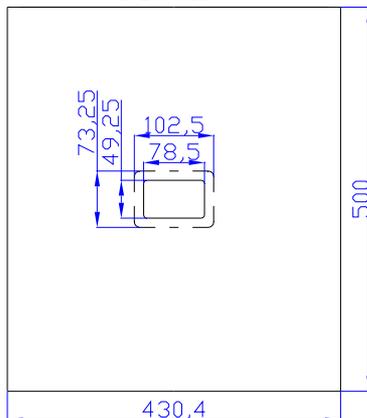

**Lateral**

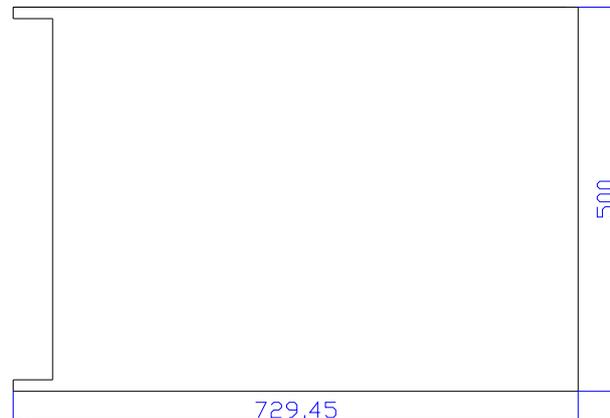

## SB15/3 Drivers

### 15P80Nd

#### KEY FEATURES


- Real 800 W AES power handling
- Sensitivity: 100 dB @ 2.83V
- 4" Duo Technology voice coil
- Forced air convection circuit for low power compression
- Extended controlled displacement:  $X_{max} \pm 7.5$  mm.
- Massive mechanical displacement capability: 52 mm p-p



#### TECHNICAL SPECIFICATIONS

• Nominal diameter	380 mm. 15 in.
• Rated impedance	8 ohms
• Minimum impedance	6.6 ohms
• Power capacity*	800 w AES
• Program power	1600 w
• Sensitivity	100 dB 2.83v @ 1m @ 2π
• Frequency range	30 - 5000 Hz
• Voice coil diameter	100 mm. 4 in.
• Magnetic assembly weight	4.62 kg. 10.16 lb.
• BL factor	23.6 N / A
• Voice coil length	20 mm
• Air gap height	12 mm
• X damage (peak to peak)	52 mm

#### DIMENSION DRAWINGS

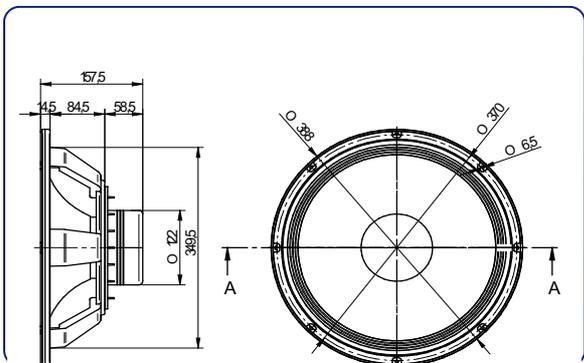

**Notes:**  
 \*The power capacity is determined according to AES2-1984 (r2003) standard.  
 Program power is defined as the transducer's ability to handle normal music program material.

## SB15/2 Presets

